


PRODUCT SPEC SHEET/KEY SPECIFICATIONS

FIREPLUG UNDEREAVE BLOCK HOLE Model # FP2011

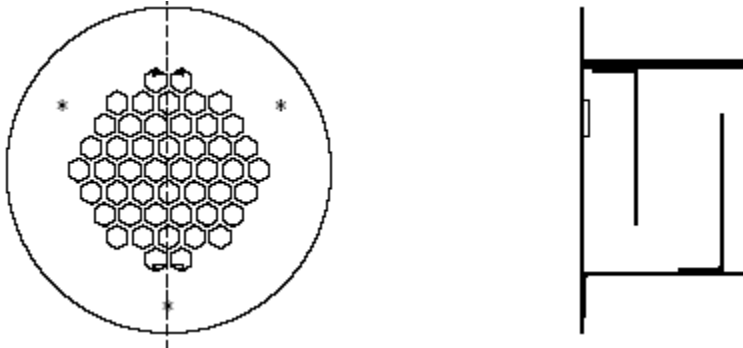

Under Eave/Soffit Vents	Model	Size L x W	NFVA Provided	Flanges available	Flange Definition	Weight
	FP2011	2" insert	1.2	ALL	FRONT	1lb
CUSTOM SIZES AND MATERIALS AVAILABLE						

BENEFITS:

- Safety vents that are used in areas prone to wildfires
- Overlapping Baffle Protection (Patent Pending)
 - Air Flow through normally
- Resists the intrusion of Flame and Embers
- Compliant with new California Ch7a Building Code
- 20 Year Warranty
- Easy Install

STANDARD MATERIALS
G90 ZINC PLATED steel, 26GA

Installation: See website: www.brandguardvents.com for installation instructions
Product is intended to be used only under a protective soffit/undereave overhang inserted into 2x blocking/frieze block. It is not intended to be used on a sidewall without a protective soffit/undereave overhang.